



PHGB010028

USA



INVESTOR IN PEOPLE

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ



I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.



Signed

Dated 25 September 2001

**THIS PAGE BLANK (USPTO)**

## Patents Form 1/77


Patents Act 1977  
(Rule 16)

The  
Patent  
Office

1/77

## Request for grant of a patent

(See notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)



The Patent Office

27 FEB 2001 09408-1 002879

P0177700 0.00 0104830.5

Charlton Road

Newport

Gwent NP10 8QQ

1. Your reference	PHGB 010028		
2. Patent application number (The Patent Office will fill in this part)	27 FEB 2001 0104830.5		
3. Full name, address and postcode of the or of each applicant ( <u>underline all surnames</u> )	KONINKLIJKE PHILIPS ELECTRONICS N.V. GROENEWOUDSEWEG 1 5621 BA EINDHOVEN THE NETHERLANDS		
Patents ADP Number (if you know it)	07419294001		
If the applicant is a corporate body, give the country/state of its incorporation	THE NETHERLANDS		
4. Title of the invention	RADIO COMMUNICATION SYSTEM		
5. Name of your agent (if you have one)	KEVIN JAMES SCOTT		
"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)	Philips Corporate Intellectual Property Cross Oak Lane Redhill Surrey RH1 5HA		
Patents ADP number (if you know it)	07688914001		
6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these	Country	Priority Application number	Date of filing
earlier applications and (if you know it) the or each application number			
7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application	Number of earlier application	Date of filing (day/month/year)	
8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer "Yes" if:	YES		
a) any applicant named in part 3 is not an inventor, or			
b) there is an inventor who is not named as an applicant, or			
c) any named applicant is a corporate body. See note (d))			

Patents form

**Patents Form 1/77**

9. Enter the number of sheets for any of the following items you are filing with this form.  
Do not count copies of the same document.

## Continuation sheets of this form

Description	11 /
Claims(s)	4 /
Abstract	1 /
Drawings	2 /

10. If you are also filing any of the following, state how many against each item:

## Priority Documents

Translations of priority documents

Statement of inventorship and right

to grant of a patent (*Patents Form 7/77*)

Request for preliminary examination and

search (*Patents Form 9/77*)

Request for substantive examination

(*Patents Form 10/77*)

Any other documents

(*Please specify*)

11. I/We request the grant of a patent on the basis of this application.

Signature



Date

27<sup>th</sup> February 2001

12. Name and daytime telephone number of person to contact in the United Kingdom

01293 81 5281

K J SCOTT

**Warning**

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

**Notes**

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered "Yes" *Patents Form 7/77* will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

**Patents Form 1**

**DESCRIPTION****RADIO COMMUNICATION SYSTEM**

5       The present invention relates to a radio communication system and further relates to primary and secondary stations for use in such a system and to a method of operating such a system. While the present specification describes a system with particular reference to the Universal Mobile Telecommunication System (UMTS), it is to be understood that such  
10 techniques are equally applicable to use in other mobile radio systems.

      There is a growing demand in the mobile communication area for a system having the ability to download large blocks of data to a Mobile Station (MS) on demand at a reasonable rate. Such data could for example be web  
15 pages from the Internet, possibly including video clips or similar. Typically a particular MS will only require such data intermittently, so fixed bandwidth dedicated links are not appropriate. To meet this requirement in UMTS, a High-Speed Downlink Packet Access (HSDPA) scheme is being developed which may facilitate transfer of packet data to a mobile station at up to 4Mbps.

20       In known radio communication systems, at any one time a MS generally communicates with a single Base Station (BS). During the course of a call the MS may wish to investigate transferring to another BS, for example when the quality of the communication link deteriorates as the MS moves away from its BS, or when the relative traffic loading of different cells requires adjusting. The  
25 process of transferring from one BS to another is known as handover.

      In a system operating according to the current UMTS specifications, the MS maintains a list of BSs known as the "active set" with which it is expected that radio links of reasonable quality can be maintained. When the MS is in dedicated channel mode, and there are multiple BSs in the active set, the MS  
30 is in "soft handover" with the BSs in the active set. In this mode uplink transmissions are received by all BSs in the active set, and all BSs in the active set transmit substantially the same downlink information to the MS

(typically the data and most of the control information would be the same, but power control commands could be different). A drawback of this "soft handover" approach is that the uplink and downlink transmission powers cannot be optimised for each individual radio link, as only one set of power control commands is transmitted in the uplink, while the power control commands transmitted over the downlink from different BSs may result in conflicting requirements for the uplink transmission power.

The normal soft handover procedure is particularly suitable for real time services such as voice links, where a continuous connection must be maintained. For packet data links, however, it can be advantageous to select the optimum BS for the transmission of each data packet to a MS, to allow for dynamically changing radio link and traffic conditions. Such possibilities are envisaged for a UMTS HSDPA system. The process of selecting a BS for transmission of subsequent data is known as site selection, and would normally be made on the basis of measurements of radio channel quality and/or considerations of system load. The selection can be made by the MS, the BS, or some combination of the two. Our co-pending unpublished United Kingdom patent application, entitled "Radio Communication System" and filed on 23 February 2001 (Applicant's reference PHGB 010027), gives details of how such a site selection mechanism could be implemented.

Proposed embodiments of HSDPA use an ARQ (Automatic Repeat reQuest) scheme to ensure correct delivery of each data packet, since accurate data transmission is viewed as more important than the reduced system throughput under poor channel conditions (due to multiple re-transmissions). One proposed HSDPA scheme employs an n-channel stop-and-wait ARQ. According to such a scheme, up to n packets may be transmitted before any are positively acknowledged. This increases throughput and has the advantage over conventional stop-and-wait ARQ schemes that if one packet is not received correctly, further packets may continue to be sent on the other channels in parallel with the retransmissions of the packet received with errors.

However, if it is required to minimise the amount of status information which has to be communicated between BSs (which is generally thought to be desirable), transfer of a downlink packet channel from one BS to another in response to site selection can only take place after a packet has been  
5 correctly received and acknowledged and not while awaiting retransmissions. This is particularly relevant in the case of ARQ using incremental redundancy, where retransmissions relating to a packet are not identical to the originally-transmitted packet but include additional redundant information. If such a scheme is being used, significant additional status information would need to  
10 be transferred between BSs if the transmission of a packet which had not been positively acknowledged were to be transferred to another BS.

In one proposed n-channel ARQ scheme, all packets to a particular MS are transmitted from a particular BS until such time as transmission of packets to that MS is switched to another BS. In networks with large numbers of MSs  
15 requiring high-speed downlink packet transmission, the requirement to transfer the complete state of an n-channel transmission from one BS to another can result in scheduling difficulties in the network and excessive signalling traffic.

An object of the present invention is to address the above problem.

20 According to a first aspect of the present invention there is provided a radio communication system comprising a primary station having means for transmitting a series of data packets to a secondary station, wherein the secondary station has means for determining whether each packet is received correctly and means for signalling this determination to the primary station, and  
25 the primary station has means for transmitting error correction information relating to a data packet which the secondary station has not received correctly to assist the secondary station in decoding that packet, means for transmitting the series of data packets via a plurality of logical channels, thereby enabling continued transmission of data packets on at least one  
30 channel while error correction information is transmitted on another channel, and handover means for transferring transmission of at least two of the logical channels to another primary station, wherein the handover means comprises

means for transferring each of the at least two logical channels individually to another primary station in response to receiving acknowledgement of successful reception of the most recently-transmitted packet on that logical channel, regardless of the status of the other logical channels.

5 By enabling the data channels to be transferred one at a time, the extra signalling which would be required to transfer a logical channel which is in the process of having error correction information transmitted is eliminated, thereby improving system performance. The error correction information may comprise retransmission of the data packet or the use of an incremental  
10 redundancy scheme. The logical channels need not all be transferred to the same primary station.

According to a second aspect of the present invention there is provided a primary station having means for transmitting a series of data packets to a secondary station, means for determining from signals transmitted by the  
15 secondary station whether each packet is received correctly, means for transmitting error correction information relating to a data packet which the secondary station has not received correctly to assist the secondary station in decoding that packet, means for transmitting the series of data packets via a plurality of logical channels, thereby enabling continued transmission of data  
20 packets on at least one channel while error correction information is transmitted on another channel, and handover means for transferring transmission of at least two of the logical channels to another primary station, wherein the handover means comprises means for transferring each of the at least two logical channels individually to another primary station in response to  
25 receiving acknowledgement of successful reception of the most recently-transmitted packet on that logical channel, regardless of the status of the other logical channels.

According to a third aspect of the present invention there is provided a secondary station having means for receiving a series of data packets from a  
30 primary station, means for determining whether each packet is received correctly and means for signalling this determination to the primary station, means for receiving from the primary station error correction information



relating to a data packet which the secondary station has not received correctly to assist the secondary station in decoding that packet, means for receiving the series of data packets via a plurality of logical channels, thereby enabling continued reception of data packets on at least one channel while  
5 error correction information is transmitted on another channel, and handover means for starting to receive at least two of the logical channels from another primary station, each of the at least two channels being transferred from the primary station to another primary station in response to acknowledgement by the secondary station of successful reception of the most recently-transmitted  
10 packet on the respective logical channel, regardless of the status of the other logical channels.

According to a fourth aspect of the present invention there is provided a method of operating a radio communication system comprising a primary station arranged to transmit a series of data packets to a secondary station,  
15 the method comprising the secondary station determining whether each packet is received correctly and signalling this determination to the primary station, and the primary station transmitting error correction information relating to a data packet which the secondary station has not received correctly to assist the secondary station in decoding that packet, transmitting  
20 the series of data packets via a plurality of logical channels, thereby enabling continued transmission of data packets on at least one channel while error correction information is transmitted on another channel, and being able to transfer transmission of at least two of the logical channels to another primary station, wherein each of the at least two logical channels may be transferred  
25 individually to another primary station in response to receiving acknowledgement of successful reception of the most recently-transmitted packet on that logical channel, regardless of the status of the other logical channels.

The present invention is based upon the recognition, not present in the  
30 prior art, that enabling transfer of each channel of an n-channel data transmission from one BS to another in a channel-by-channel manner improves system operation.

Embodiments of the present invention will now be described, by way of  
5 example, with reference to the accompanying drawings, wherein:

Figure 1 is a block schematic diagram of a radio communication  
system;

Figure 2 is a block schematic diagram of a HSDPA system in which a  
secondary station can select which of a plurality of primary stations transmits  
10 the data;

Figure 3 is a diagram illustrating operation of a known n-channel ARQ  
scheme for HSDPA; and

Figure 4 is a diagram illustrating operation of an n-channel ARQ  
scheme in accordance with the present invention.

15 In the drawings the same reference numerals have been used to  
indicate corresponding features.

Referring to Figure 1, a radio communication system comprises a  
primary station (BS) 100 and a plurality of secondary stations (MS) 110. The  
20 BS 100 comprises a microcontroller ( $\mu$ C) 102, transceiver means (Tx/Rx) 104  
connected to antenna means 106, power control means (PC) 107 for altering  
the transmitted power level, and connection means 108 for connection to the  
PSTN or other suitable network. Each MS 110 comprises a microcontroller  
( $\mu$ C) 112, transceiver means (Tx/Rx) 114 connected to antenna means 116,  
25 and power control means (PC) 118 for altering the transmitted power level.  
Communication from BS 100 to MS 110 takes place on a downlink channel  
122, while communication from MS 110 to BS 100 takes place on an uplink  
channel 124.

A MS 110 operating in a HSDPA system is illustrated in Figure 2, the  
30 MS 110 having three two-way communication channels 226a, 226b, 226c, each  
comprising an uplink and a downlink channel, with three respective BSs  
100a, 100b, 100c. At any given time the MS 110 receives data packets from

one of the BSs 100a,100b,100c on a respective downlink channel 226a,226b,226c. Site selection is enabled by the MS 110 selecting which of the BSs 100a,100b,100c it wishes to transmit subsequent data packets. Operation of such a system can be improved by combining site selection and  
5 ARQ messages in a single code word, as disclosed in our co-pending unpublished United Kingdom patent application 0104220.9 (Applicant's reference PHGB010023). Operation of such a system is also improved by the MS 110 operating parallel power control loops with each of the BSs 100a,100b,100c, as disclosed in our co-pending unpublished United Kingdom  
10 patent application 0103716.7 (Applicant's reference PHGB010022), which facilitates selection of the best BS on a per-packet basis.

An example of a 4-channel ARQ scheme operating in known manner is illustrated in Figure 3. Data packets 302, identified as  $P_n$  where  $n$  is a sequence number, are transmitted in sequence on a downlink channel (DL)  
15 122 from a BS 100 to a MS 110. Each packet 302 is assigned to a logical channel (CH) in turn, starting with the first packet. Hence, packet  $P_1$  is assigned to channel 1, packet  $P_2$  to channel 2 and so on. ARQ is performed separately for each channel.

In the illustrated scenario, the first data packet  $P_1$  is sent via the first  
20 logical channel and is received correctly by the MS 110, which transmits an acknowledgement ( $A_1$ ) 304 on an uplink channel 124. Hence, when channel 1 is next scheduled for transmission, the next packet awaiting transmission,  $P_3$  is selected and transmitted to the MS 110. Similarly, the second data packet  $P_2$  is sent via the second logical channel. However, this packet is not received  
25 correctly by the MS 110, which issues a negative acknowledgement ( $N_2$ ) 306. Hence, when channel 2 is next scheduled for transmission, packet  $P_2$  is transmitted again. This time it is correctly received, and an acknowledgement 304 is issued on the uplink channel 124, thereby freeing channel 2 to transmit further packets 302.

30 Such a scheme can provide improved throughput compared with a single channel ARQ scheme, since incorrect reception of one data packet 302 does not prevent further data packets being transmitted on other logical

channels. However, the scheme can present problems in a system in which the BS 100 transmitting the data packets can be changed at short notice depending on radio channel conditions. In particular, significant signalling between BSs 100a,100b,100c may be required to indicate both the last  
5 successfully transmitted packet 302 together with information relating to packets 302 not yet successfully transmitted and their respective logical channels. This is especially the case if incremental redundancy is used, in which case the exact state of transmission of each failed packet 302 needs to be signalled. If the system is able to change transmitting BS 100a,100b,100c  
10 every few packets, as may be considered a preferred option, the signalling traffic may comprise a significant fraction of the data traffic.

This problem is addressed in a system made in accordance with the present invention by enabling each of the logical channels to be transmitted by a different BS 100a,100b,100c. Figure 4 illustrates operation of such a  
15 scheme, with four logical channels and three BSs 100a,100b,100c. The first BS 100a transmits logical channels 1 and 2 over a first downlink channel DL<sub>1</sub>, the second BS 100b transmits logical channel 3 over a second downlink channel DL<sub>2</sub> and the third BS 100c transmits logical channel 4 over a third downlink channel DL<sub>3</sub>. In such a system, transfer of packet transmission from  
20 one BS 100a,100b,100c to another is simplified because each logical channel can be transferred when its most recently-transmitted packet 302 has been correctly received. In other words, this can result in retransmissions from the first BS 100a being transmitted to the MS 110 on one logical channel in parallel with transmissions of new packets from the second BS 100b on  
25 different logical channels to the same MS 110.

Furthermore, in a system made in accordance with the present invention it is not necessary to transfer all channels to the new BS even when the most recent packet has been positively acknowledged, but different channels can continue to be transmitted from different BSs for example in  
30 order to make use of available capacity at different BSs where one BS may not have enough capacity to carry the entirety of the packet traffic to a particular

MS. The site selection process could even be made to operate for groups of one or more logical channels instead of the complete set of logical channels.

As illustrated in Figure 4, the logical channels are time-multiplexed so as to appear effectively as a single data stream at the MS 110. However, other methods of transmitting in parallel may be used as alternatives (or in combination with time-multiplexing or with each other), including for example frequency-, code- and space-multiplexed. In the case of space-multiplexing, a directional antenna pattern could be used at the MS 110, with different lobes being used for the different ARQ channels.

In one embodiment, the mapping of packets to particular BSs 100a, 100b, 100c may be carried out according to the traffic loading of different BSs. The packet rate from each BS might be proportional to their spare capacity.

In another embodiment, the mapping of packets to particular BSs may be carried out according to the differing QoS (Quality of Service) requirements of different packets. Different QoS requirements may be due to the packets being destined for different applications running on the MS 110. Alternatively, packets with different QoS requirements could result from the same application, for example in the case of a speech codec outputting different classes of bits depending on their importance. Packets of data requiring a low BER (Bit Error Rate) or a low transmission delay would be transmitted from BSs with the shortest packet queues and/or the best quality links to the MS 110.

The present invention gives greater flexibility for scheduling packets in the network and for mapping the traffic to the available air interface resources.

Although the embodiments described above have been in terms of a UMTS FDD system, the present invention is not restricted to use in such a system and may be applied in a wide range of systems, for example including TDD (Time Division Duplex).

In practice the amount of data transmitted before BS selection is performed again may be more than one packet, depending on the system overheads of changing the transmitting BS.

In the embodiments described above each data packet is transmitted to the MS 110 from one BS at a time. However, it may be advantageous in some circumstances for the same packet to be transmitted simultaneously from more than one BS. For example, in a situation where three BSs 100a, 100b, 100c are  
5 under closed loop power control, if two of the BSs provide an equally good link quality, preferably with similar transmit powers, the data packet or packets may be transmitted concurrently from those two base stations (in a similar manner to transmissions during soft handover).

In a variation on the embodiments described above, there could be  
10 more than one data link between a primary and a secondary station. For example, the invention could be applied to the transfer of logical channels between radio links at different frequencies even if they are between the same pair of stations.

From reading the present disclosure, other modifications will be  
15 apparent to persons skilled in the art. Such modifications may involve other features which are already known in the design, manufacture and use of radio communication systems and component parts thereof, and which may be used instead of or in addition to features already described herein. It will be appreciated that certain features of the invention which are, for clarity,  
20 described in the context of separate embodiments may also be provided in combination in a single embodiment. Conversely, various features of the invention which are, for brevity, described in the context of a single embodiment may also be provided separately or in any suitable subcombination. Although claims have been formulated in this application to  
25 particular combinations of features, it should be understood that the scope of the disclosure of the present application also includes any novel feature or any novel combination of features disclosed herein either explicitly or implicitly or any generalisation thereof, whether or not it relates to the same invention as presently claimed in any claim and whether or not it mitigates any or all of the  
30 same technical problems as does the present invention. The applicants hereby give notice that new claims may be formulated to such features and/or

combinations of features during the prosecution of the present application or of any further application derived therefrom.

In the present specification and claims the word "a" or "an" preceding an element does not exclude the presence of a plurality of such elements.

- 5 Further, the word "comprising" does not exclude the presence of other elements or steps than those listed.

## CLAIMS

1. A radio communication system comprising a primary station having means for transmitting a series of data packets to a secondary station, wherein the secondary station has means for determining whether each packet is received correctly and means for signalling this determination to the primary station, and the primary station has means for transmitting error correction information relating to a data packet which the secondary station has not received correctly to assist the secondary station in decoding that packet, means for transmitting the series of data packets via a plurality of logical channels, thereby enabling continued transmission of data packets on at least one channel while error correction information is transmitted on another channel, and handover means for transferring transmission of at least two of the logical channels to another primary station, wherein the handover means comprises means for transferring each of the at least two logical channels individually to another primary station in response to receiving acknowledgement of successful reception of the most recently-transmitted packet on that logical channel, regardless of the status of the other logical channels.

20

2. A system as claimed in claim 1, characterised in that the error correction information comprises a retransmission of the data packet not received correctly.

25

3. A system as claimed in claim 1, characterised in that the error correction information enables the secondary station to employ an incremental redundancy scheme.

30

4. A primary station having means for transmitting a series of data packets to a secondary station, means for determining from signals transmitted by the secondary station whether each packet is received correctly, means for transmitting error correction information relating to a data packet which the



secondary station has not received correctly to assist the secondary station in decoding that packet, means for transmitting the series of data packets via a plurality of logical channels, thereby enabling continued transmission of data packets on at least one channel while error correction information is transmitted on another channel, and handover means for transferring transmission of at least two of the logical channels to another primary station, wherein the handover means comprises means for transferring each of the at least two logical channels individually to another primary station in response to receiving acknowledgement of successful reception of the most recently-transmitted packet on that logical channel, regardless of the status of the other logical channels.

5. A primary station as claimed in claim 4, characterised in that all of the logical channels are transferred to another primary station.

15

6. A secondary station having means for receiving a series of data packets from a primary station, means for determining whether each packet is received correctly and means for signalling this determination to the primary station, means for receiving from the primary station error correction information relating to a data packet which the secondary station has not received correctly to assist the secondary station in decoding that packet, means for receiving the series of data packets via a plurality of logical channels, thereby enabling continued reception of data packets on at least one channel while error correction information is transmitted on another channel, and handover means for starting to receive at least two of the logical channels from another primary station, each of the at least two channels being transferred from the primary station to another primary station in response to acknowledgement by the secondary station of successful reception of the most recently-transmitted packet on the respective logical channel, regardless of the status of the other logical channels.

30

7. A secondary station as claimed in claim 6, characterised in that site selection means are provided for selecting at least one primary station from a plurality of available primary stations for the transmission of subsequent data packets to the secondary station.

5

8. A method of operating a radio communication system comprising a primary station arranged to transmit a series of data packets to a secondary station, the method comprising the secondary station determining whether each packet is received correctly and signalling this determination to the  
10 primary station, and the primary station transmitting error correction information relating to a data packet which the secondary station has not received correctly to assist the secondary station in decoding that packet, transmitting the series of data packets via a plurality of logical channels, thereby enabling continued transmission of data packets on at least one  
15 channel while error correction information is transmitted on another channel, and being able to transfer transmission of at least two of the logical channels to another primary station, wherein each of the at least two logical channels may be transferred individually to another primary station in response to receiving acknowledgement of successful reception of the most recently-  
20 transmitted packet on that logical channel, regardless of the status of the other logical channels.

9. A system as claimed in claim 8, characterised by the primary station transferring each logical channel to the same other primary station.

25

10. A radio communication system constructed and arranged to operate substantially as hereinbefore described with reference to and as shown in the accompanying drawings.

30 11. A primary station constructed and arranged to operate substantially as hereinbefore described with reference to and as shown in the accompanying drawings.

12. A secondary station constructed and arranged to operate substantially as hereinbefore described with reference to and as shown in the accompanying drawings.

5 13. A method of operating a secondary station substantially as hereinbefore described with reference to and as shown in the accompanying drawings.

**ABSTRACT****RADIO COMMUNICATION SYSTEM**

5        A radio communication system comprises a primary station which is arranged to transmit a series of data packets to a secondary station which operates according to an ARQ scheme for acknowledging correct reception of each packet. The primary station transmits error correction information relating to any packets that are not received correctly, thereby enabling the secondary  
10    station to extract correctly the data. The data packets are transmitted via a plurality of logical channels, so that an error in transmission of one packet does not hold up transmission of packets in other channels. Transfer of data transmission from one primary station to another is done by transferring each channel when correct reception of a data packet on that channel has been  
15    acknowledged, thereby avoiding the extra signalling required in transferring logical channels in which a data packet has been received in error and the error correction transmissions have not been completed.

20    (Figure 4)

1/2

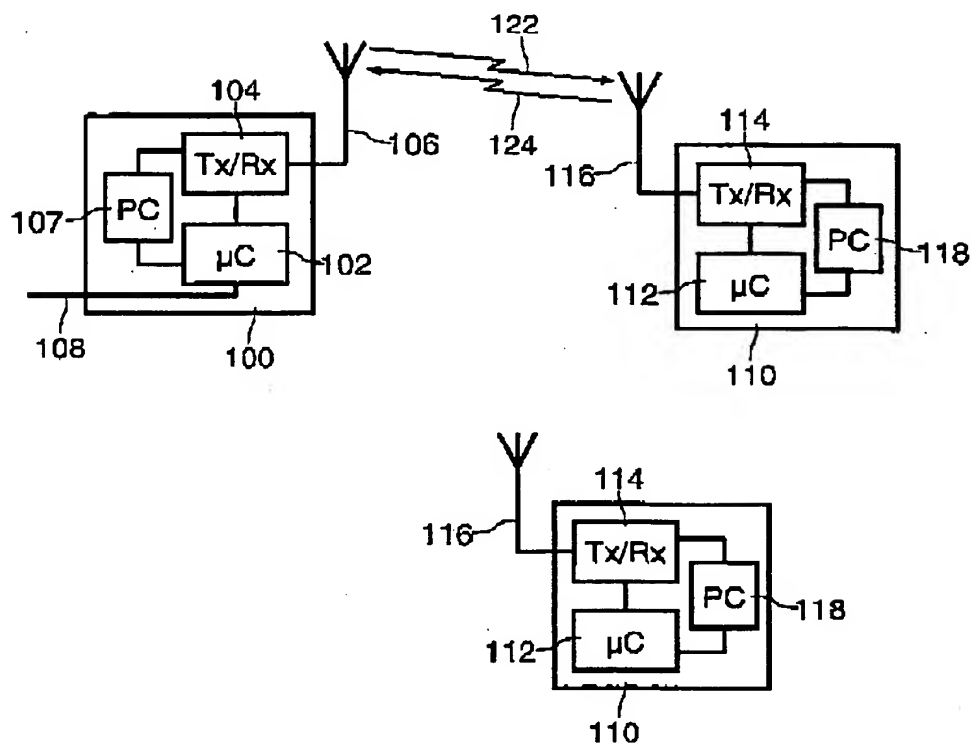


FIG. 1

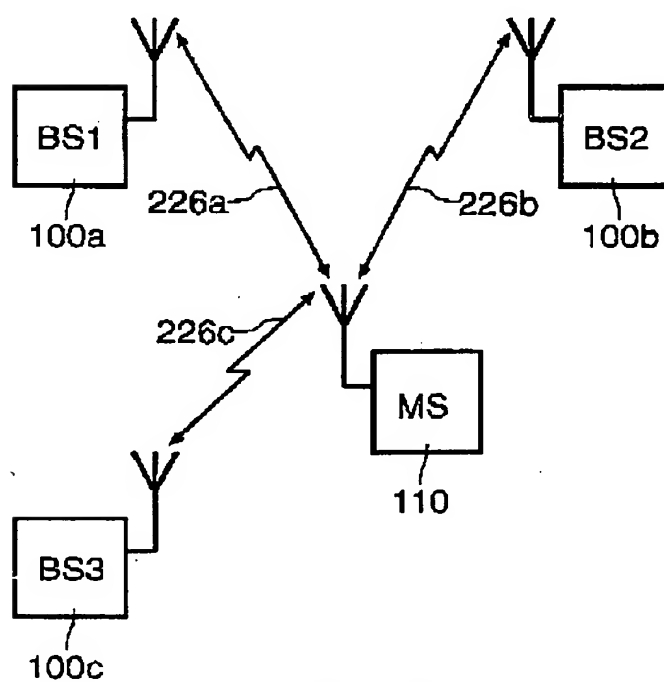


FIG. 2

**THIS PAGE BLANK (USPTO)**

2/2

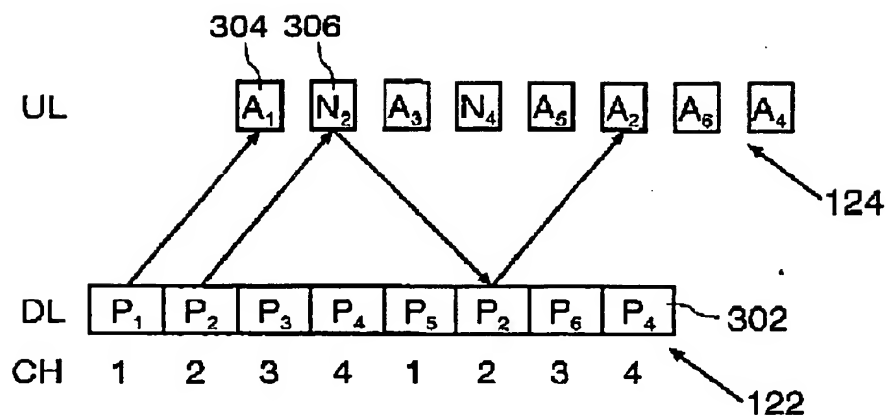


FIG. 3

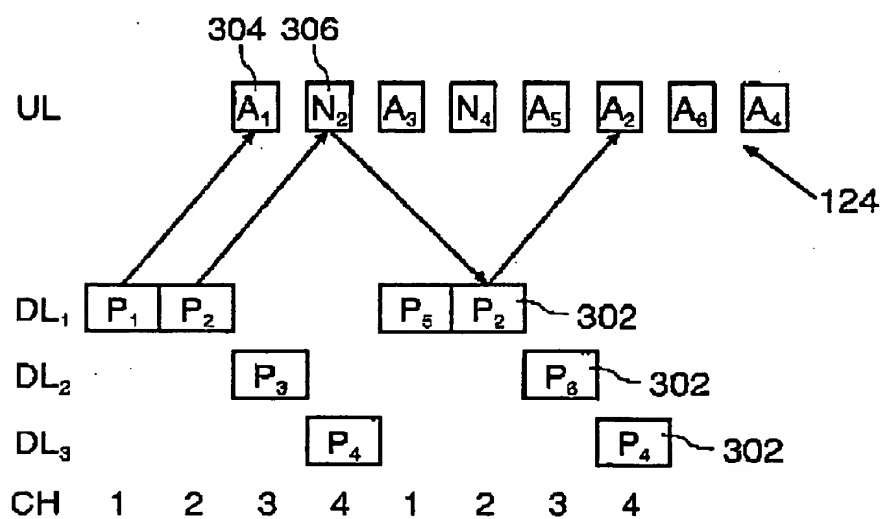


FIG. 4

**THIS PAGE BLANK (USPTO)**